

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/063106 A1

(51) International Patent Classification⁷: A47K 7/00, 7/02,
3/00, A61H 7/00, E03C 1/22

(21) International Application Number:
PCT/AU2004/001846

(22) International Filing Date:
23 December 2004 (23.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003907173 31 December 2003 (31.12.2003) AU

(71) Applicant and

(72) Inventor: COOK, Murray, Norman [AU/AU]; 52 Treave
Street, Cloverdale, Western Australia 6105 (AU).

(74) Agent: WRAY & ASSOCIATES; The Quadrant, 1
William Street, Perth, Western Australia 6000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DRAIN BRUSH

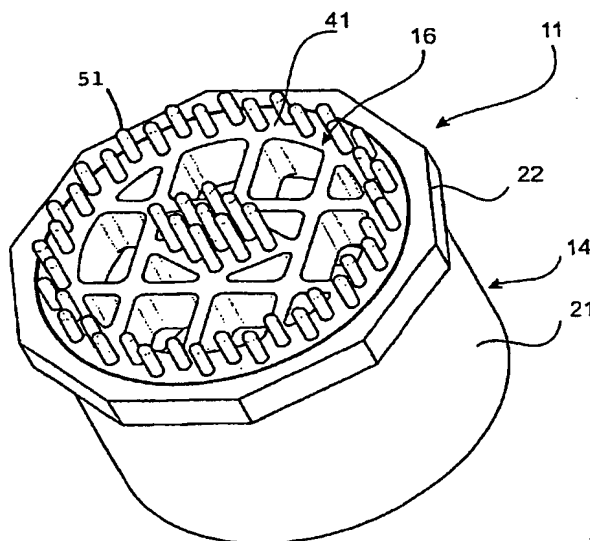

(57) Abstract: A brush assembly adapted to be mounted to a drain. The drain brush assembly (11) comprises a housing (14), a brush head (16) and a set of bristles (51). The housing is adapted to be engaged with a drain to provide the inlet to the drain. The brush head (16) is supported by the housing to extend across the drain inlet. The set of bristles (51) extends from the outermost axial face of the brush head (16). The brush head (16) is supported by the housing (14) to be resiliently depressible into the housing (14).

WO 2005/063106 A1

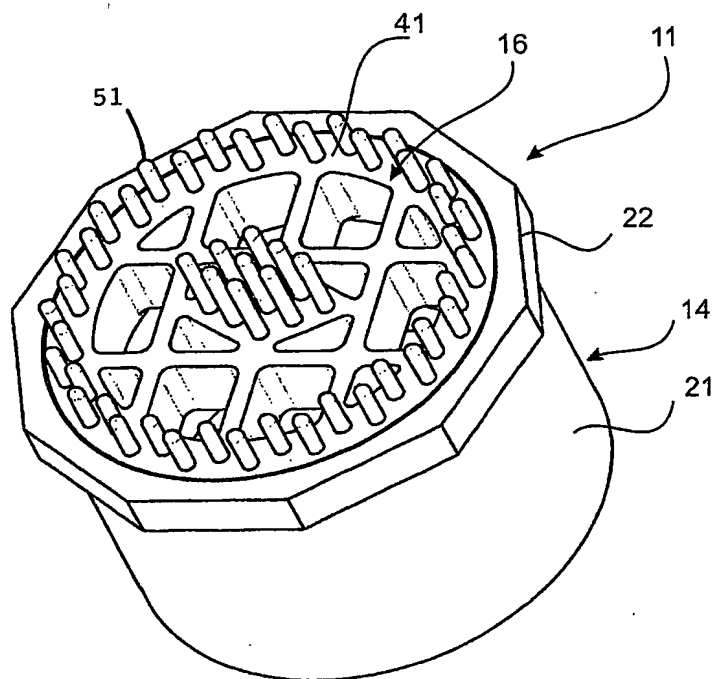


Fig. 1

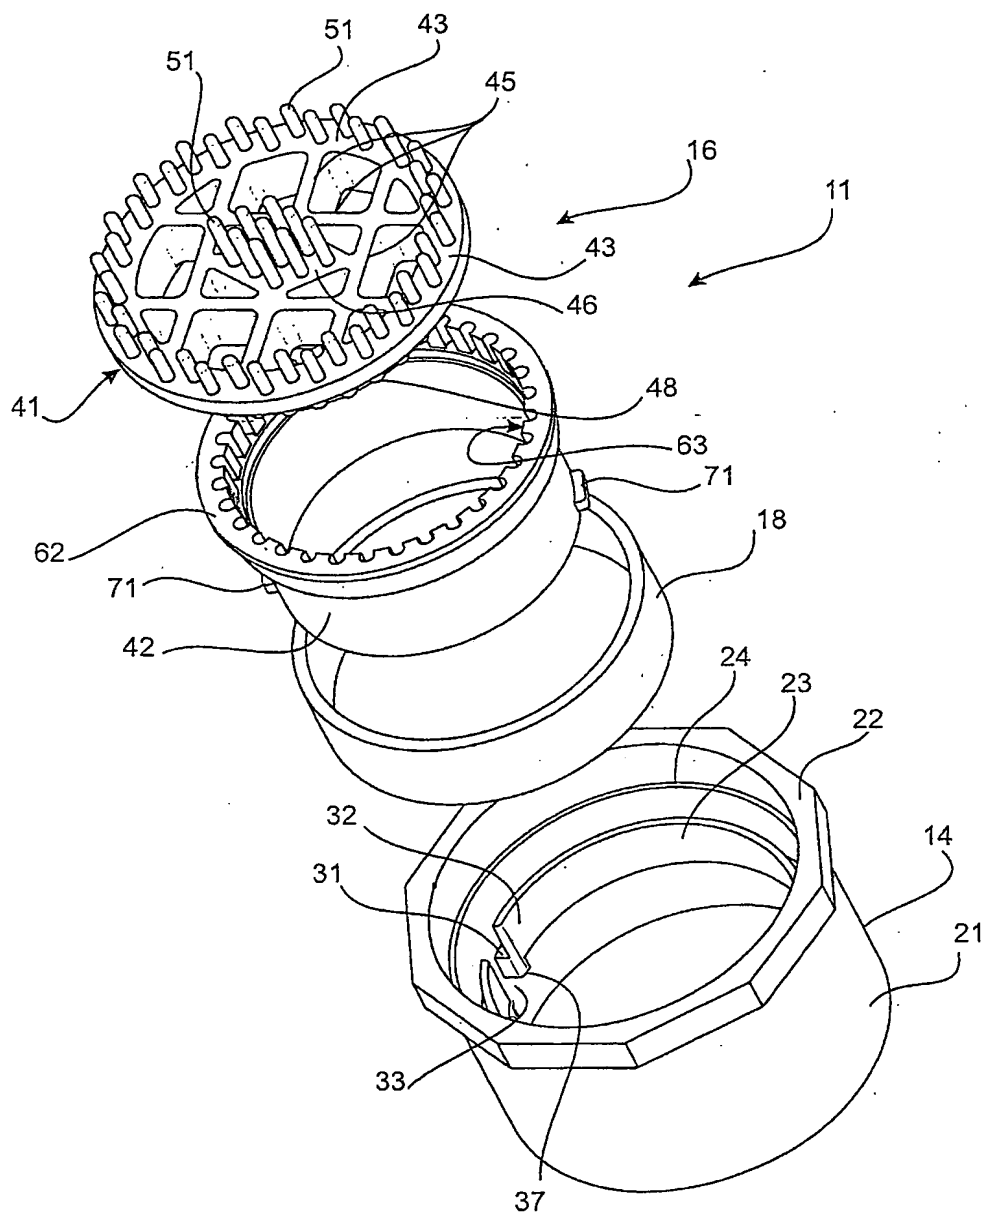


Fig. 2

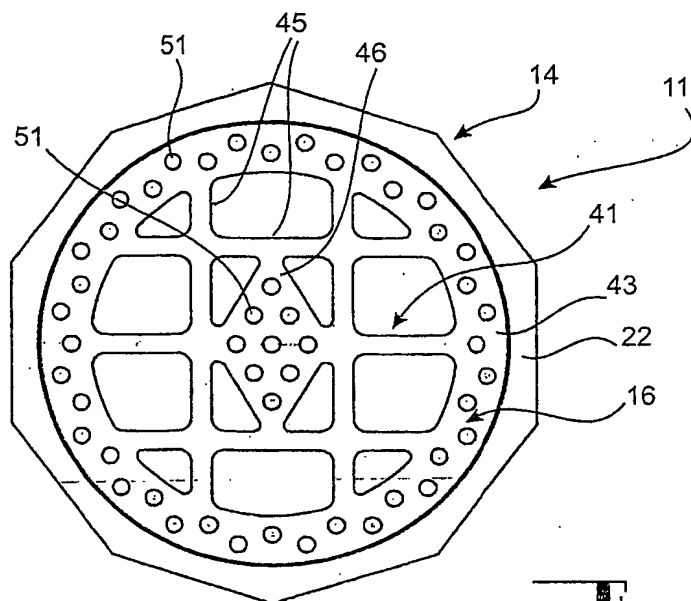


Fig. 3

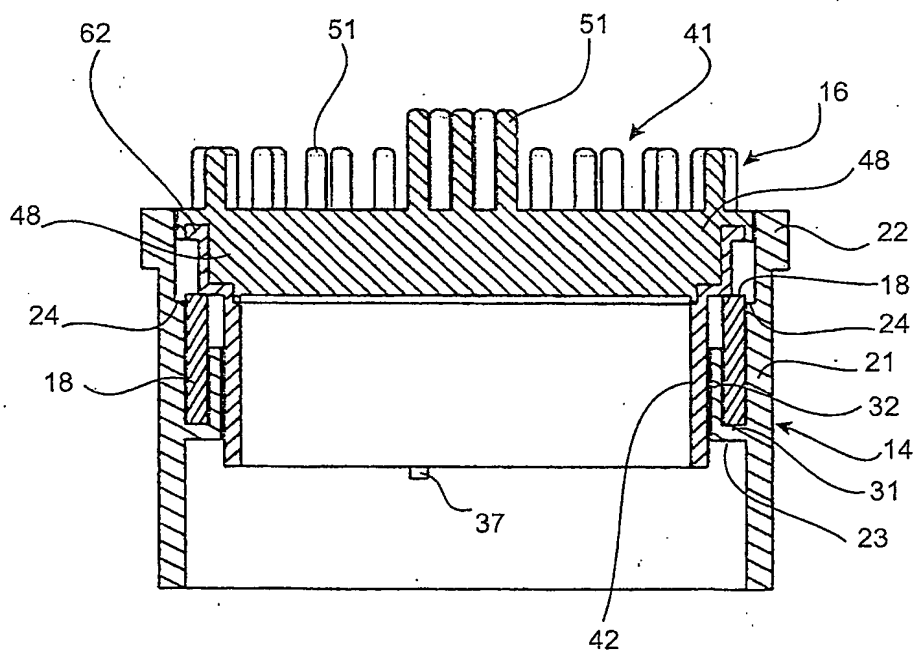


Fig. 4

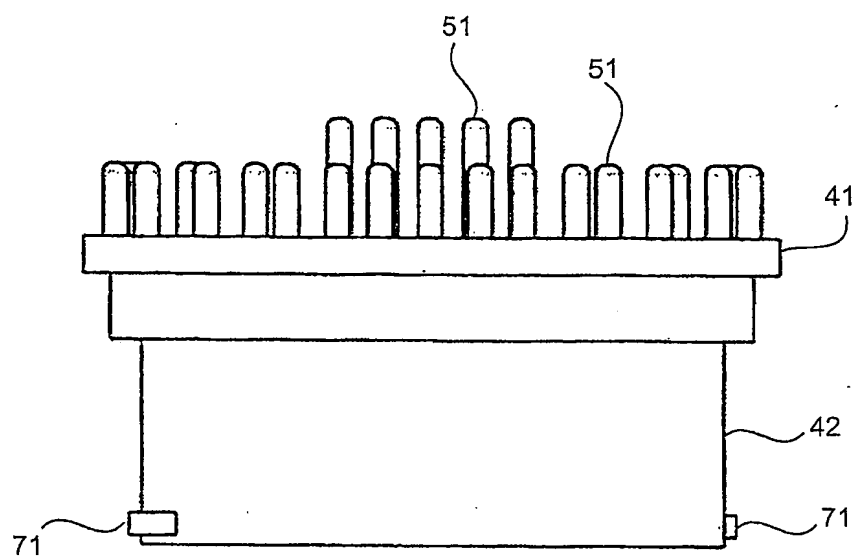


Fig. 5

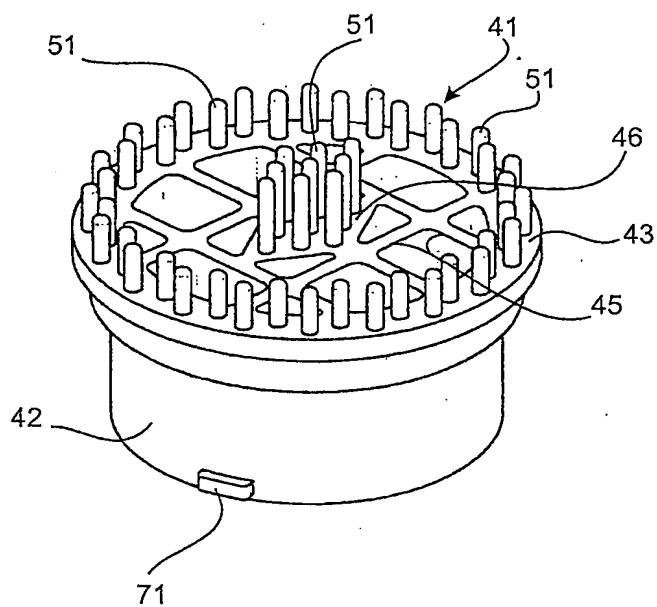


Fig. 6


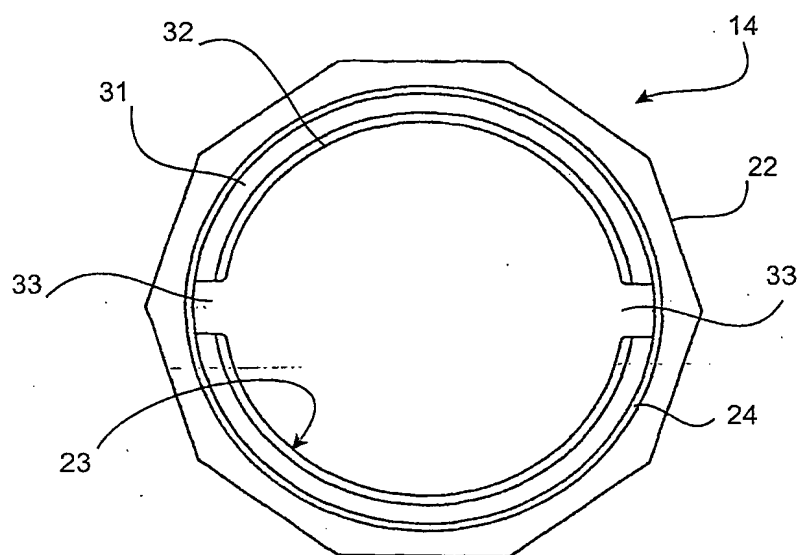


Fig 7

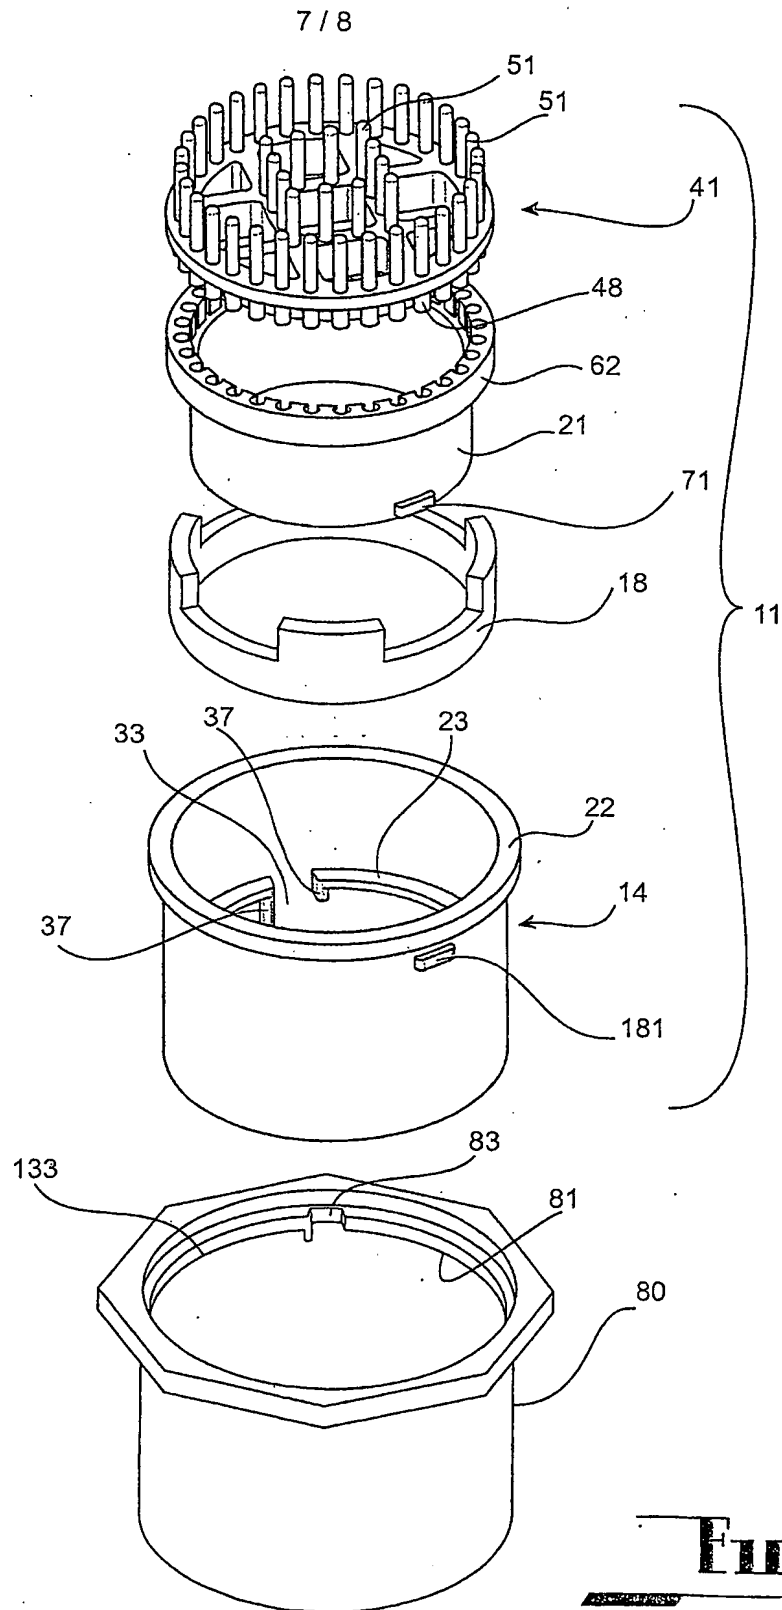

8 / 8

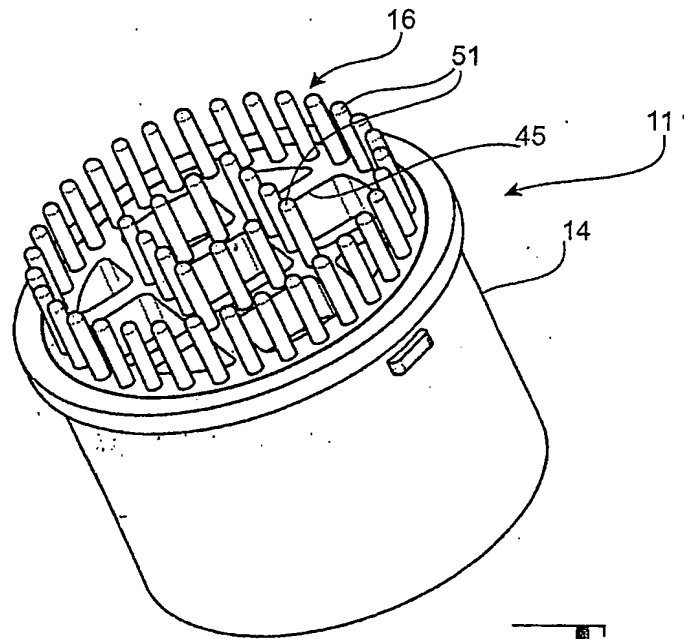


Fig. 9

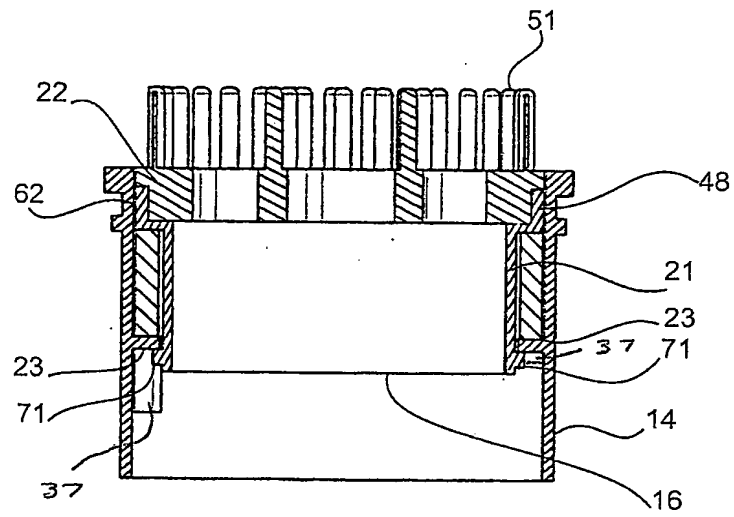


Fig. 10